

In compliance with Regulation 305/2011/EU of the European Parliament and of the Council of 9 March 2011 (the Construction Products Regulation - CPR) this certificate applies to the construction product

**Glued laminated timber (glulam)
Glued solid timber**

according to the product specification listed in the current addendum to this certificate produced by

Company

FRANZ KIRNBAUER KG

SÄGE- & HOBELWERK - HOLZHANDEL

Gasteil 9

AT-2640 Prigglitz

and produced in the manufacturing plant

AT-2630 Ternitz, Hauptstraße 2

This certificate attests that all provisions concerning the assessment and verification of constancy of performance described in Annex ZA of the standard

EN 14080:2013

under system 1 being certified for the performances set out in this certificate are applied and that the construction product fulfils/products fulfil all the prescribed requirements for these performances.


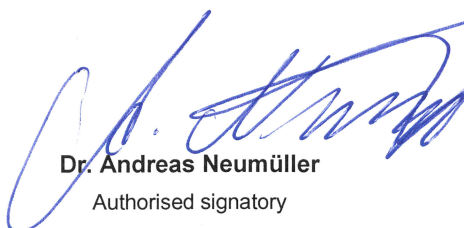
Certificate number: 1359-CPR-0609

Date of first issue: 07.04.2015


Date of issuance: 06.10.2015

This certificate will remain valid as long as the test methods and/or factory production control requirements included in the harmonised standard used to assess the performances of the declared essential characteristics, do not change, and the construction product, and the manufacturing conditions in the plant are not modified significantly, unless suspended or withdrawn by the product certification body.

For the validity of this certificate see www.holzforchung.at.



Dr. Andreas Neumüller
Authorised signatory

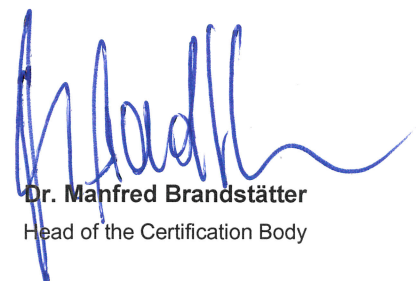

Dr. Manfred Brandstätter
Head of the Certification Body

Annex to Certificate 1359-CPR-0609

Date of issue: 06.10.2015

Scope of certification for the following products:

GLUED LAMINATED TIMBER (GLULAM)

Timber species/ strength classes:	PCAB - spruce; ABAL - fir: GL 24h, GL 28h, GL 30h PNSY - pine: GL 24h
Mechanical resistance:	according to EN 14080:2013
Service classes:	NK 1, NK 2
Adhesive:	
- Finger joints	Type I: PUR according to EN 15425
- Surface bonding	Type I: PUR according to EN 15425
Reaction to fire:	D-s2, d0
Formaldehyde class:	E1
Natural durability class:	according to EN 350-2

GLUED SOLID TIMBER

Timber species/strength classes:	PCAB - spruce; ABAL - fir: C 24
Mechanical resistance:	according to EN 338
Service classes:	1, 2
Max. dimension:	240 x 280 mm
Adhesive:	
- Finger joints	Type I: PUR according to EN 15425
- Surface bonding	Type I: PUR according to EN 15425
Reaction to fire:	D-s2, d0
Formaldehyde class:	E1
Natural durability class	according to EN 350-2